



FILM COSTING THICKNESS GAUGE # ZFCTG


FIRST TIME USE (or Battery replacement)

1. Insert the batteries and close the cover.



NOTE: Please read each of the entire numbered paragraphs before proceeding!

2. Layout the metal plate and calibration film as pictured.

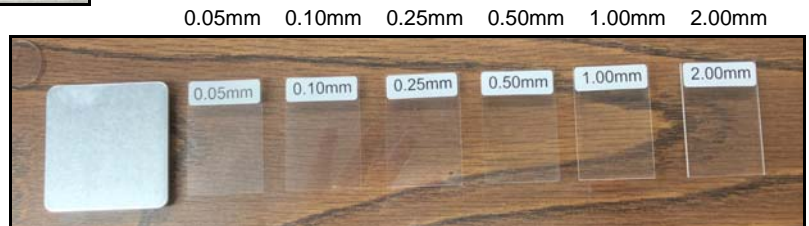

READY FOR "AUTO CALIBRATION"

THE UNIT WILL PROMPT YOU TO GAUGE EACH OF THE 6 FILM THICKNESS: **0.05mm** TO **2.00mm**

3. Press the **MODE** button plus the **ON (ZERO)** button simultaneously.
All **8.8.8.8** appear then HOLD until **0 0 0** appear .



4. When **0 0 0** and the small **mmC** (LOWER RIGHT) appear you are in "AUTO CALIBRATION MODE".
Immediately PRESS the unit on to the METAL PLATE to calibrate "**0**" FILM THICKNESS.
TWO BEEPS are sounded to record the reading.



5. The UNIT will then prompt you to gauge **0.05mm**.
Place the **0.05mm** film on the metal plate and GAUGE the **0.05mm** film.
TWO BEEPS are sounded to record the reading.



6. The UNIT then automatically displays the next calibration film thickness (**0.10mm**).
Repeat as above until all 6 films are calibrated.

7. After the **2.00mm** film is calibrated the screen will display OVER indicating the calibration is complete and will shut off automatically..



THE UNIT IS NOW CALIBRATED AND READY FOR USE.